






### Débitmètre et régulateur de débit

#### Application :

Pour emploi dans le solaire thermique, le chauffage et l'hydronique

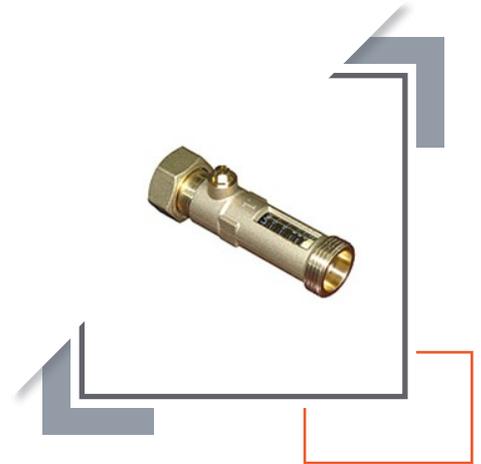

| DIMENSIONS (mm)   |             |      |         |         |                                 |      |         |         |
|-------------------|-------------|------|---------|---------|---------------------------------|------|---------|---------|
| Réf               | 654         |      |         |         | 655                             |      |         |         |
| Raccord           | Mâle / Mâle |      |         |         | Mâle / Femelle - Écrou tournant |      |         |         |
| Dimension raccord | 3/4"G       | 1"G  | 1"1/4 G | 1"1/2 G | 3/4"G                           | 1"G  | 1"1/4 G | 1"1/2 G |
| A                 | 105         | 102  | 128.5   | 144.5   | 114.5                           | 107  | 131.5   | 134     |
| B                 | 25.4        | 22.4 | 30      | 38      | 35.4                            | 27.5 | 33      | 27.5    |
| C                 | -           | -    | -       | -       | 8.2                             | 12   | 11.5    | 10.8    |
| CH                | -           | -    | -       | -       | 30                              | 36.5 | 45      | 52      |
| DN                | 15          | 15   | 20      | 20      | 15                              | 15   | 20      | 20      |
| Poids (g)         | 281         | 274  | 568     | 763     | 328                             | 365  | 640     | 732     |

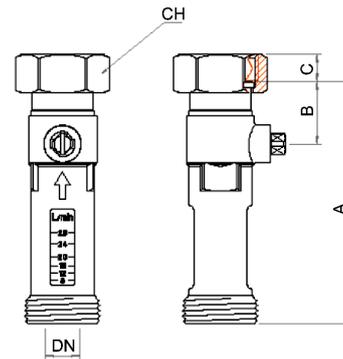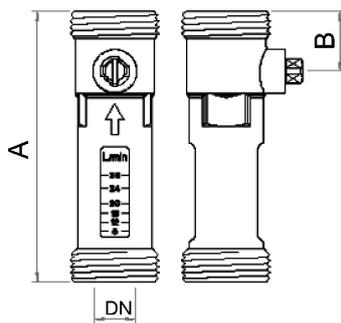

| CARACTÉRISTIQUES TECHNIQUES |                 | PLAGES DE RÉGULATION (l/min) |      |      |       |       |
|-----------------------------|-----------------|------------------------------|------|------|-------|-------|
| Corps                       | Laiton CW617N   | <b>3/4"G</b>                 | 1-6  | 2-12 | 8-38  |       |
| Sphère                      | Laiton CW641N   | <b>1"G</b>                   | 2-12 | 8-38 | 5-42  | 20-70 |
| Raccord                     | BSP cylindrique | <b>1"1/4 G</b>               |      | 5-42 | 20-70 |       |
| T° de service               | 0° C ... 120° C | <b>1"1/2 G</b>               |      | 5-42 | 20-70 |       |
| PMS                         | 10 bar          |                              |      |      |       |       |