




COLLIER A TOURILLON EN ACIER ZINGUÉ

DESCRIPTION

- Collier a tourillon en acier zingué.
- Certification En ISO 9001 : 2000.
- Le collier à tourillon permet le montage de tous les flexibles.



Référence ADG	d	D	B1	S1	L1	L2	M	Couple en Nm
073T-17	17	19	18	0.6	40	8	5	4.5
073T-20	20	22	18	0.6	40	8	5	4.5
073T-23	23	25	18	0.6	40	8	5	4.5
073T-26	26	28	18	0.6	40	8	5	4.5
073T-29	29	31	20	0.8	50	10	6	8
073T-32	32	35	20	0.8	50	10	6	8
073T-36	36	39	20	0.8	50	10	6	8
073T-40	40	43	20	0.8	50	10	6	8
073T-44	44	47	22	1.2	60	10	6	8
073T-48	48	51	22	1.2	60	10	6	8
073T-52	52	55	22	1.2	60	10	6	8
073T-56	56	59	22	1.2	60	10	6	8
073T-60	60	63	22	1.2	60	13	8	25
073T-64	64	67	22	1.2	60	13	8	25
073T-68	68	73	24	1.5	65	13	8	25
073T-74	74	79	24	1.5	65	13	8	25
073T-80	80	85	24	1.5	75	13	8	25
073T-86	86	91	24	1.5	75	13	8	25
073T-92	92	97	24	1.5	75	13	8	25
073T-98	98	103	24	1.5	75	13	8	25
073T-104	104	112	24	1.5	80	13	8	25
073T-113	113	118	24	1.5	80	13	8	25
073T-122	122	130	24	1.5	80	13	8	25
073T-131	131	139	26	1.7	105	17	17	50
073T-140	140	148	26	1.7	105	17	17	50
073T-149	149	161	26	1.7	105	17	17	50
073T-162	162	174	26	1.7	105	17	17	50
073T-175	175	187	26	1.7	120	17	17	50
073T-188	188	200	26	1.7	120	17	17	50
073T-201	201	213	26	1.7	120	17	17	50
073T-214	214	226	26	1.7	120	17	17	50
073T-227	227	239	26	1.7	120	17	17	50
073T-240	240	252	26	1.7	120	17	17	50
073T-248	248	260	26	1.7	120	17	17	50

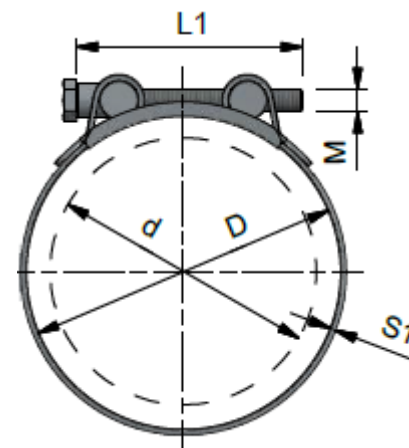

Les informations contenues dans cette fiche produit sont données à titre indicatif et sous réserve de modifications éventuelles sans préavis.

